

feelspo^t

Wifi Tuya


ZigBee Tuya

Tuya Intelligent Curtain Motor Product Instruction




Please read this instruction manual carefully before using the product and keep it properly.

Motor Assembly Steps

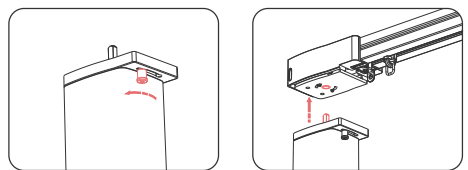


1. Check whether the bolt is in the graphic position. If not, please move the bolt to the left.
2. The motor drive shaft is aligned with the flat hole of the main gearbox gear.

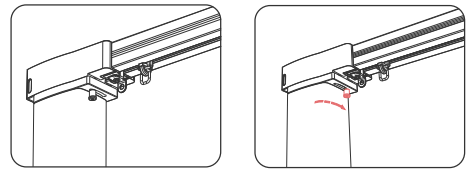


3. Insert the motor drive shaft into the flat hole of the main gearbox gear and adjust it to the same position.
4. Pull the latch to the right and fasten it.

Motor Disassembly Steps


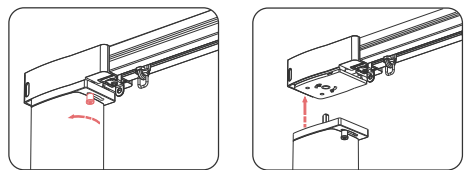


1. Pull down the latch and push to the left.
2. Remove the motor down.

Motor Structure Diagram

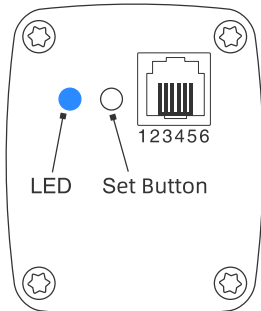


Remote Control pairing Steps

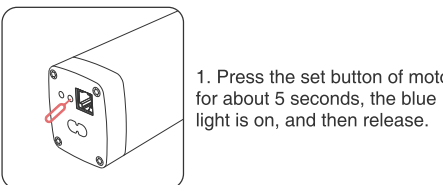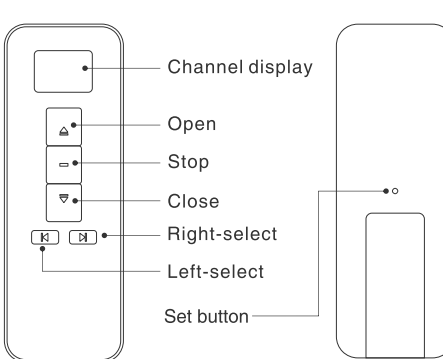


1. Press the set button of motor for about 5 seconds, the blue light is on, and then release.
2. Press the "Left-Select" or "Right-Select" button on the remote control to select the remote control channel. After confirming the remote control channel, press the set button on the back of the remote control. The blue light of motor is off, means study code successfully.

Restore Original Setting









- Press the set button of motor for about 5 seconds, the blue light is on, and then release. Press the set button of motor for about 7 seconds again, the blue light is off, means the memory of remote control is cleared.

Switch The Running Direction



- Press the set button of motor for about 15 seconds until the blue light flashes quickly and then release it, the motor will run reversely.


Motor Structure Diagram

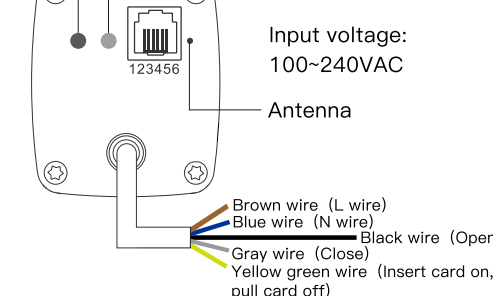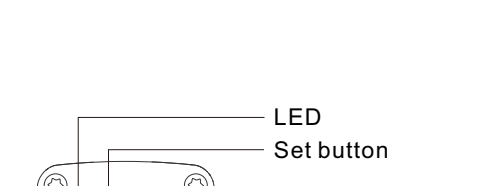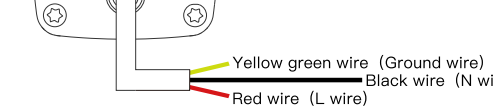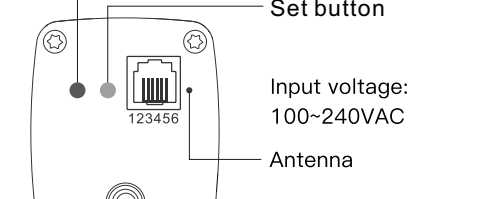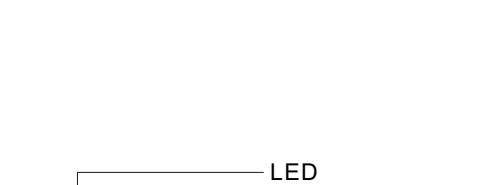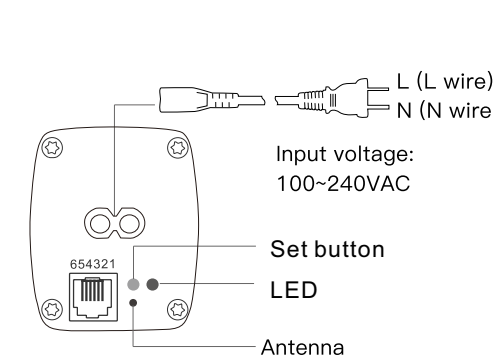

Wiring method:

1. Two wire control: power on the L wire and N wire, which can be equipped with a remote controller; All other wires are empty and wrapped with insulating tape to prevent leakage!
2. Three wire control: the Open, Close and N wire are connected to the controller, which can be used with the controller; All other wires are empty and wrapped with insulating tape to prevent leakage!
3. Four wire control: the L wire and N wire are powered on, and Open and Close are connected to the controller, which can be equipped with a remote controller and a remote controller at the same time; The yellow green wire are empty. Wrap them with insulating tape to prevent electric leakage!
4. Five wire control: the L wire and N wire are powered on, the Open and Close are connected to the controller, and the yellow green wire are connected to the card access box, which can be equipped with remote controller, controller and card access box.

Smart Central Control



The function of 6P plug:

1. 5
2. Open
3. Close
4. Stop
5. Common
- 6.

1. The contact time of the dry contact mode is more than 0.5 seconds.
2. There are three dry contact control mode for you to choose, please specify when ordering.


Intelligent weak current Control mode A (4 line)		Intelligent weak current Control mode B (3 line)	
5	common	5	common
5-2	open	5-2	open
5-3	close	5-3	close
5-4	stop	5-2-3	stop

Intelligent weak current control mode (3 line)			
Common			
First 5-2	Open	Second5-2	Stop
		Second5-3	Stop
		Third5-2	Open
First 5-3	Close	Second5-3	Stop
		Second5-2	Stop
		Third5-3	Close


Tuya Motor Networking




1. Scan the QR code or search for "Tuya Smart" app in the app store to download and register for the Tuya account.
2. Open the "My Home" interface of the Tuya smart app and click the "+" icon in the upper right corner.




3. Android system select "Small Home Appliances" - "Curtains (others)"; IOS system select "Small Home Appliances" - "Curtain (other)" or "Curtain".
4. Power on the Wi-Fi motor that needs to be equipped with the network. Press the set button of the motor, the blue light is on, then release it. Press the set button again, the blue light flashes quickly.




5. After confirming the indicator rapidly blink, click Next.



7. Adding device... If the time is over, please follow the above steps to re-operate.




6. After entering the Wi-Fi password, click Next.




8. The device added successfully, click Done.

Remove Device




1. Open the "My Home" interface of the Tuya Smart app and select the device to be removed.



2. Click the icon in the top right corner.


Interface Description

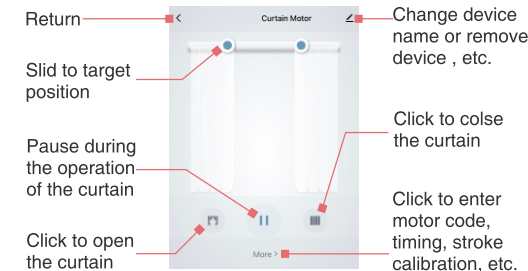


ZigBee Motor Networking




1. Scan the QR code or search for "Tuya Smart" app in the app store to download and register for the Tuya account.




2. Open the "Home" interface of the app and click "Add Device" or the "+" icon in the upper right.




3. Select "Gateway Control" to find your ZigBee Gateway, and follow its instructions. Return to "Home" interface after completing its instruction.




4. Back to the "Home" interface of the app and click the "+" icon in the upper right.

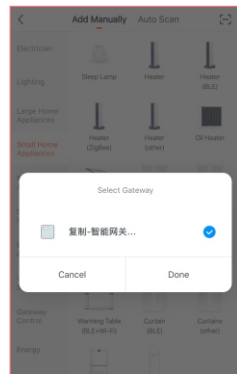


6. Click "Done" after selecting the right Gateway.

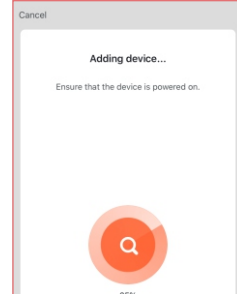


8. Adding device... If the time is over, please follow the above steps to re-operate.

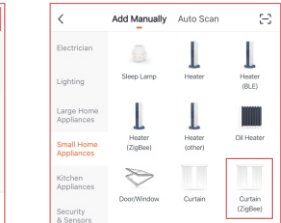

5. Manually Select "Small Home Appliances" - "Curtain (ZigBee)"

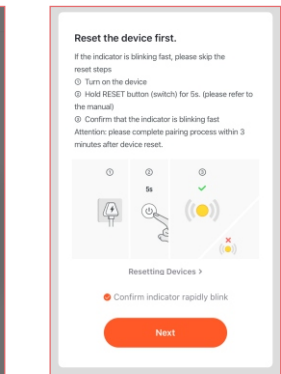

7. Follow the instruction. Click "Next" after confirming indicator rapidly blink.

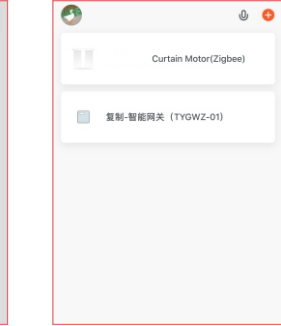


9. The device added successfully.

Remove Device




1. Open the "Home" interface of the app and select the device to be removed.

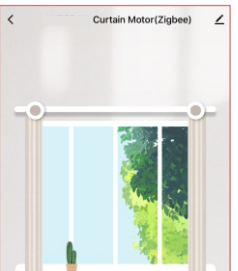


2. Click the icon in the upper right.


Interface Description

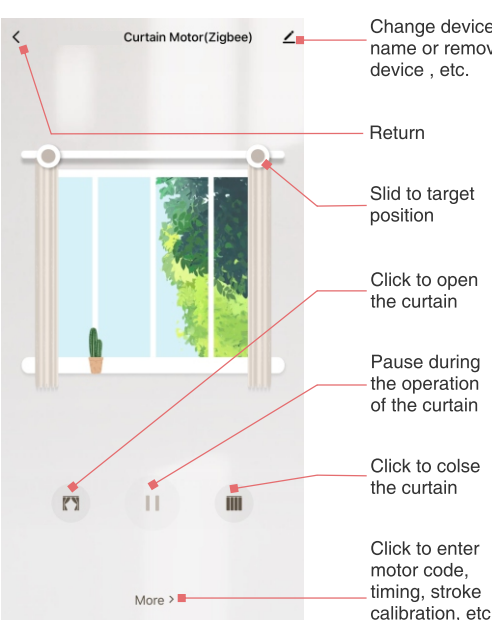


APP Automatic Connection




1. Open the "Home" page in the APP and select "Add device".

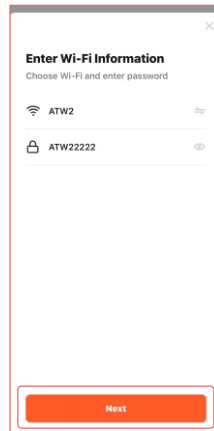


3. Select WiFi and click "Next".

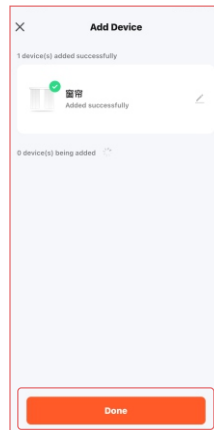

5. After the device is successfully added, click "Done".



2. Select the "Curtain motor" found automatically on the page.

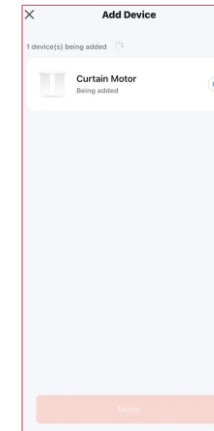

4. Adding a device.



6. Open the curtain control page.

Voice Control Method

Tuya smart motor supports Amazon Alexa, Google home etc control.

Voice Control Method:

1. Network the smart curtain motor through the "Tuya Smart" app.
2. Bind the Tuya smart account to the APP corresponding to the voice assistant to perform voice control.

TuyaSmart Docking Amazon Alexa

1. Download the "Amazon Alexa" app and add the required docking Alexa according to the prompts (the voice assistant needs to be connected to the same wifi with the curtain motor).

2. Open the "Amazon Alexa" app, Tap "Skills&Games" in the hamburger menu, then search "TuyaSmart". Select "TuyaSmart" and tap "ENABLE" to enable the Skill.

3. You will be redirected to the account link page. Type in your TuyaSmart account and password, don't forget to select the country/region where your account belongs to. Then tap "Link Now" to link your TuyaSmart account.

4. After the authorization is successful, the Tuya smart will automatically connect to the paired smart curtain motor, click on the device synchronization, you can start to use the Alexa voice control the electric curtain.

TuyaSmart Docking Google Home

1. Download the "Google Home" app and add the required docking Google home according to the prompts (the voice assistant needs to be connected to the same wifi with the curtain motor).

2. Open the "Google Home" app. On the homepage of Google Home app, click the button in the lower right corner, select "MORE SETTING", select "Home CONTROL" under the list of "ASSISTANT", and then click the plus sign in the lower right corner.

3. Find "TuyaSmart" in the list. In the new window, select your TuyaSmart account's region, type your TuyaSmart account and password, then tap "Link Now". After you assign rooms for devices, your devices will be listed in the Home Control page.

4. After the authorization is successful, the Tuya smart will automatically connect to the paired smart curtain motor, click on the device synchronization, you can start to use the Google home voice control the electric curtain.