
Installation guide

PY600×600 | Recessed LED skylight luminaire

01 Prepare the ceiling opening


Cut an opening in the ceiling according to the selected model. For PY600×600, the required cutout is 585 × 585 mm.

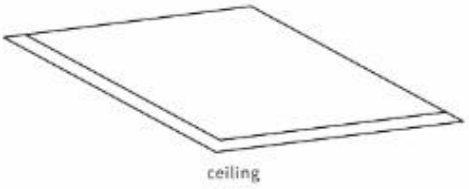

Model	Opening size
PY300600	585x285mm
PY600600	585x585mm
PY6001200	585x1185mm


02 Connect the power supply

Switch off the mains supply. Connect the luminaire power cable to the building supply using the terminal block, as shown in the diagram. Electrical connections must be made by a qualified electrician.

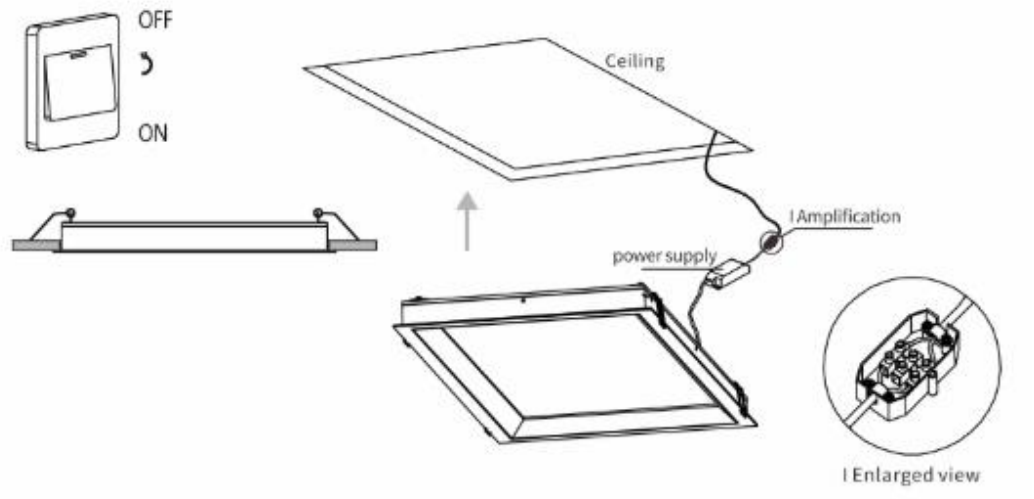

03 Secure the luminaire

Align the luminaire with the prepared ceiling opening. Raise the side spring clips and insert the luminaire until the clips secure it against the ceiling.

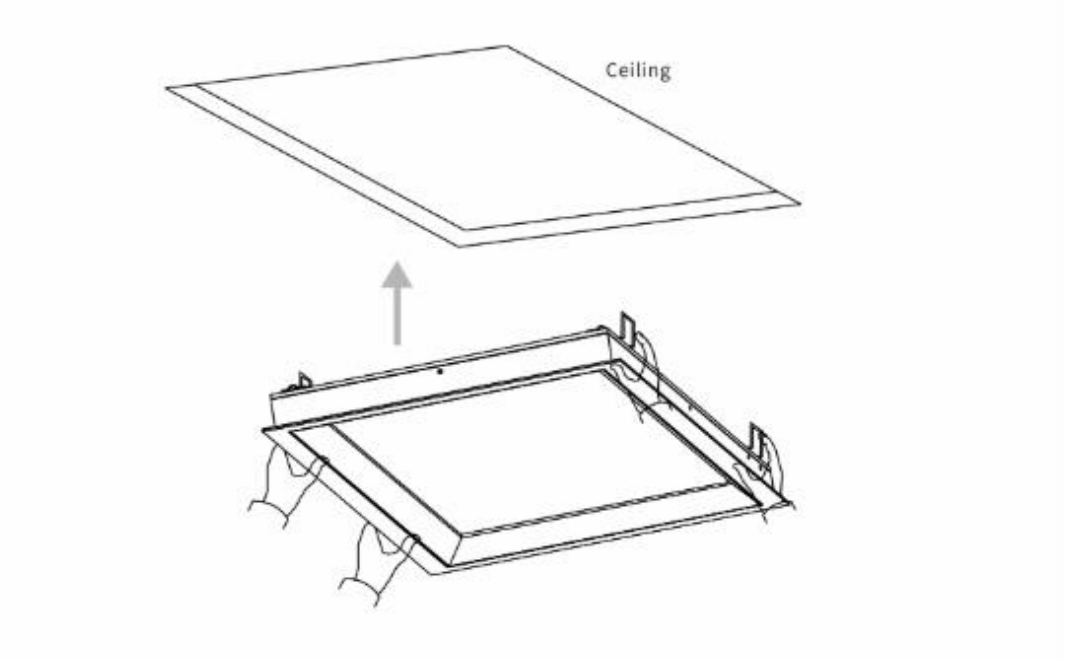

04 Check the installation and switch on

Check that the luminaire is firmly secured and the electrical connection is safe. Restore the mains supply and switch on the light.



05 Adjust the lighting

Once installed, adjust brightness and light colour using the compatible control system. Follow the instructions supplied with the applicable controller or app. Available control functions depend on the luminaire configuration.

SAFETY NOTE Disconnect power before installation or servicing.