# feelspo°t

## Centrinis Tuya valdiklis Feelspot FS8E



#### **Contents**

Chapter 1 Product presentations	3
1.1 Appearance	3
1.2 Main Features	3
Chapter 2 Product Specifications	4
RK3326S Quad core Cortex-A35	4-5
Chapter 3 Ports and Specifications	5
3.1 Interface and ports	5-6
3.2 Specifications	7
Chapter 4 Installation instructions	8
4.1 Installation drawings	8-9
4.2 Wires connection drawing	10
Chapter 5 Operation guideline	11
5.1 Safety Notes****	12
5.2 Operation guideline	11-19

#### **Chapter 1 Product presentation**

#### 1.1 Appearance





#### 1.2 Main Features

- With optional Asian | EU | US back base, one design for global users, simple inwall installations.
- 8-inch HD LCD, IPS, multi touch screen, double microphones with noise reduction, built in 2 x 1W speakers, light sensor, temperature and humidity sensor.
- ZigBee gateway function, APP remote control.
- Control the lights, curtains, air conditioners, and all other
   Smart Home devices. Configure smart home scenes in the
   APP, turn on the scene mode with one touch on the screen.

## **Chapter 2 Product Specifications**


Specification				
СРИ	RK3326S Quad core	os	Android 11	
	Cortex-A35			
RAM	2GB	Screen	8 Inch (800*1280)	
			Multi-Touch Screen	
ROM	16GB	Bluetooth	BLE 5.2 Single point	
WiFi	2.4G/5G	Zigbee	Zighoo 2 0	
VVIFI	( IEEE802.11a/b/g/n/ac/ax)		Zigbee 3.0	
Relay			Scene Switch*2 with	
	2 Circuits (200W Each)	Key	indicator lights	
Ports	USB Type-C port	Push	On   OFF   RESET all in	
	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Button	one button	
	Functions			
Voice	Feelspot FS8E supports voice assistants like Amazon			
Control	Alexa, Google Assistants.			
Gateway	Built-in Tuya Zigbee and support custom zigbee.			
Relays	Built in 2 relays (200W Each) which can control 2 switches of the			
	room lights locally.			
Music play	Built in 2*1W Mono speakers, users can custom their local			

	music source play, online music sources optional.						
Light sensor	Automatically	adjust	the	screen	brightness	according	to
	surroundings.						


One Smart Control Panel could control all your smart switches, smart sockets, lights, air conditioners, curtains, clothes hangers, security cameras, smart sensors, up to 100+ ZigBee sub devices.

### **Chapter 3 Ports and Specifications**


#### 3.1 Interface and ports

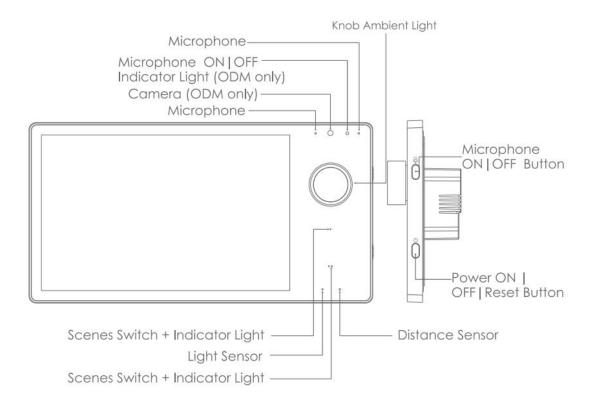


#### Option 1 - US Back Base

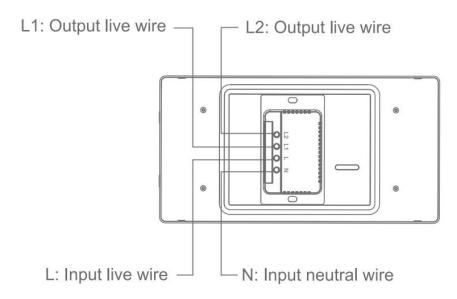

### Option 2 - EU | UK | UAE Back Base

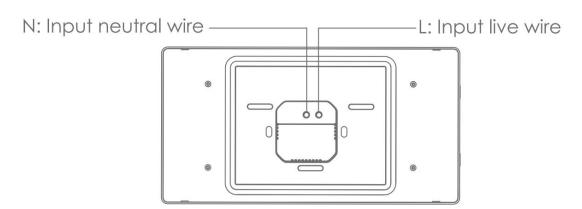

Option 3 - Asian Back Base

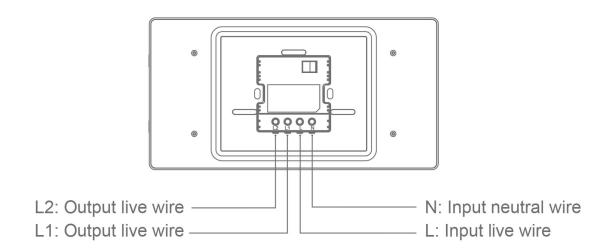

## 3.2 Specifications


Item	Specifications			
Product	O" Coopet Multi functional Knob Danel			
Name	8" Smart Multi-functional Knob Panel			
Product	Feelspot FS8E			
Model				
Input Power	100-240VAC, 50/60Hz			
Working	0°C to +40°C			
Temperature	0 0 140 0			
Working	5% to 90%RH(Non-condensing)			
Humidity	576 to 3076KH(Non-condensing)			
Wireless	Wi-Fi, Bluetooth, Zigbee			
Protocol	VVI-I I, Bidetootii, Zigbee			
	Feelspot FS8E: 238.4 x 125 x 37mm (With the back base)			
Product				
dimensions				
Net weight	About 772g			


#### **Chapter 4 Installation instructions**


- Turn off the main power in the electricity box and confirm the live wire is not alive with a test pencil.
- Check the wires and make sure the wires are in good contact with the terminals and no exposed copper wires.
- Seperate the back base from panel by built-in magnetic force (as shown in the pictures following).
- Connect the live wire to terminal L and neutral wire to terminal N.
- Fasten the base to the wall box with mounting screws and fix the smart panel back to the base by built-in magnetic force.
- Note that the screws should not be fixed too tight during installation in case any deformation or damage to the screen and hardware.
- If your smart panel is not flat after installation, do not press the screen violently, please check the wall box and the base installation at first.

#### 4.1 Installation drawings

(Taken EU wall boxes installation as an example.)

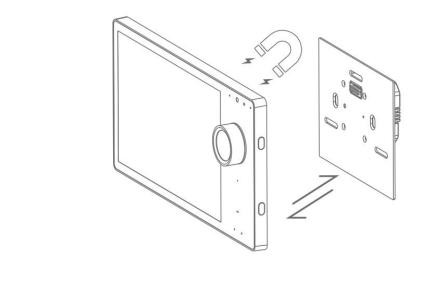

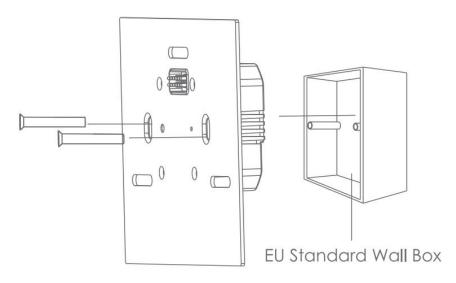

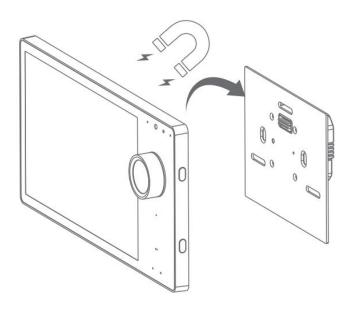



Note: Make sure the circuit power were cut off before wire connections!

Circuit breaker used as disconnected device shall be incorporated in the electrical installation of the building.

Depth of the wall box should be more than 50mm.

### 4.2 Wires connection drawing

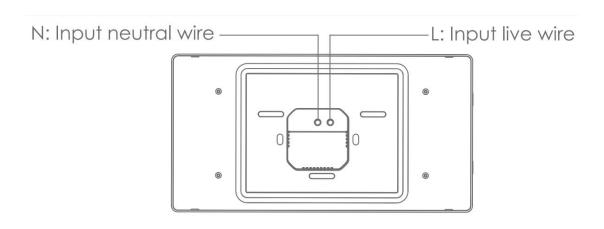



#### **Chapter 5 Operation guideline**

#### 5.1 Safety Notes\*\*\*\*

- •This product must be installed by professional electricians.
- Turn off the main power in the electricity box and confirm the live wire is not alive with a test pencil, and this product should be kept away from fire and water during installation and use.
- This product can not be used in moisture circumstances such as bathroom.

#### 5.2 Operation guideline


\*This operation guideline is based on Tuya ZigBee, Tuya

App,Tuya cloud platform and Smatek Feelspot FS8E

firmware. If any other platforms or firmware, please
follow their operation guidelines.


(1)The product will be turned on once you connect it to the power supply. The product will get to the network settings

when you start it in the first time. You can also get into the network settings from the select menu by swiping down from the top of the LCD screen.

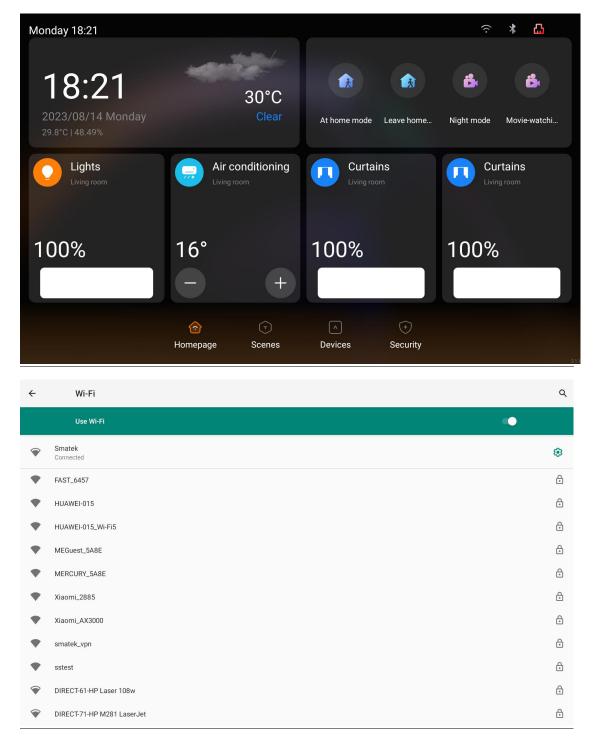


(2) There is a wireless wifi connection in the network settings.


You can select it. There will be a QR code showing on the screen after the network connection is done.

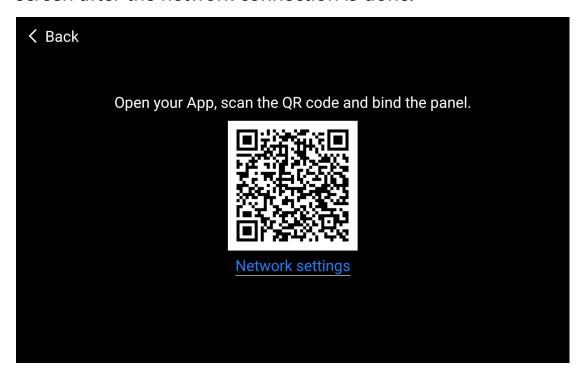


(3) Start the Tuya App in your smart phone, select the " • " at top right corner in the App home page, and then select the " at top right corner in the App page.

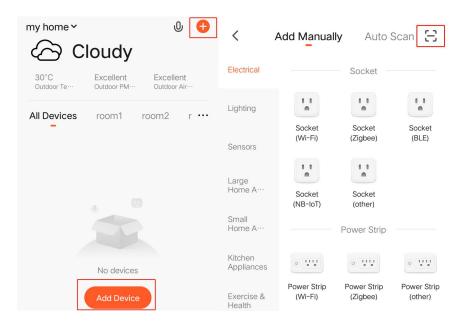

(4) Scan the QR code on the screen of the product to add it into the Tuya App. You will find a panel icon in your App.

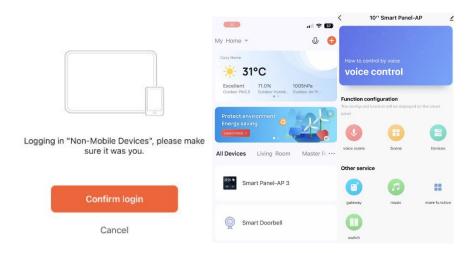

(5) Enter the panel interface in the Tuya App, you will see the gateway and switch icons like and . Click the switch icon to control 2 local switches (load of each switch for lamps should be no more than 200W.). It means the switch is off when the icon is in grey, and the switch is on when it is in orange.

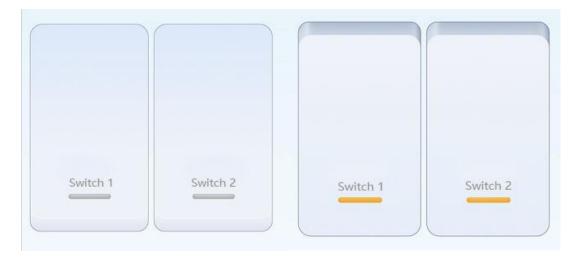


Long press switch 1 or switch 2 to change the name of the switch.

(6) Click the gateway icon to add ZigBee sub devices.

Make sure the ZigBee sub devices are in the set-up mode.

The gateway will search and add the sub devices
automatically. You can follow the user manual of the sub
devices to make sure it is in set-up mode. (Usually it is long
press the power button or the reset button in 5s, then the
LED indication light flickering which means it is in the
set-up mode.)


You will see the following pictures in the Tuya App when you are adding sub devices to the gateway. Make sure the sub devices are in the set-up mode and the LED indication light is flickering.




(7) Click the Done button on the App after you add the sub device successfully. For example (3 Gang Switch) as the following.




(8) You could change the name of the sub devices after they are added to the gateway successfully.



# Swipe down - sync to have devices and scenes sync to panel.

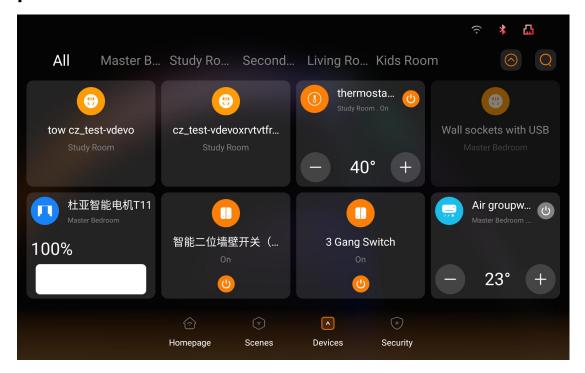


(9) You could change the device type by getting into the device interface in the App. It means the switch is off when it is in grey, and the switch is on when it is in green. You could also set up timers(Schedule) for the switches to realize the automation control.

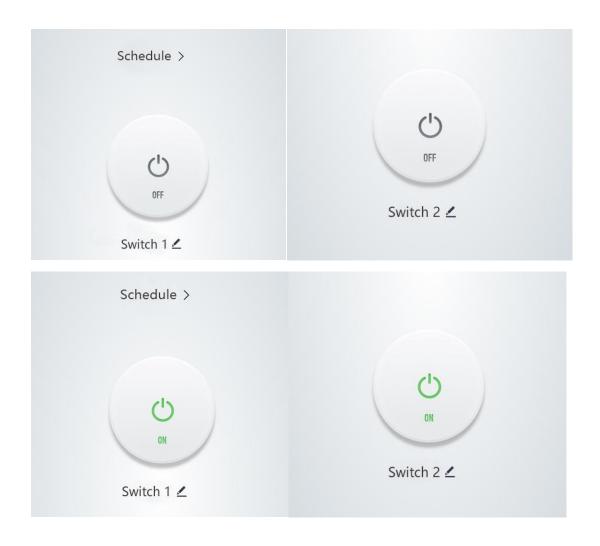


(10) To create scenes, enter Tuya smart App - Scene Tap-to-Run (not Automation) - create scenes - Launch
Tap-to-Run- Then - Run the device and configure different
devices work at the same time as a scene. And you can
rename your scenes.

Swipe down and click sync to have your devices and scenes sync to panel, now one tap on panel, whole home automation.

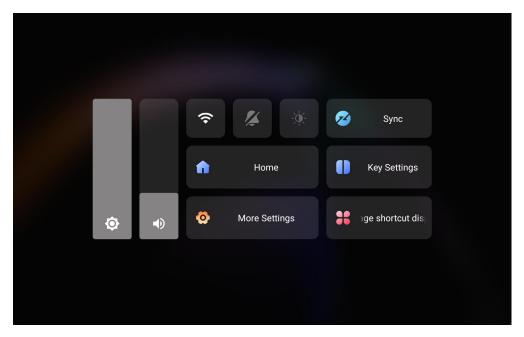

Swipe down - Key Settings to define the right 2 touch scene switches + knob controller by your specific devices or scenes on your App.

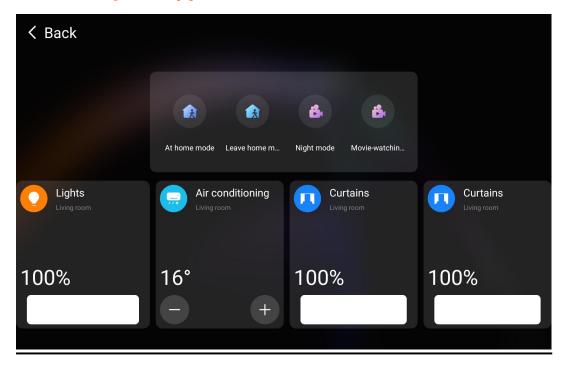

If there is any questions when you add some other sub devices, please contact us for support.